



Applications and installation


- 1-Water Supply
- 2-Pressure Boosting

Operation conditions

- 1- Min well diameter : 3"
- 2-Max liquid temperature + 40 C

Specifications

- 1-Rewindable motor
- 2- 230 Volt - 50 HZ
- 3- With 30 mt cable and control box

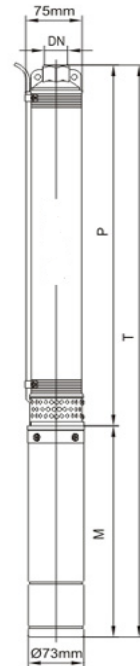

3" NORYL IMPELLER PUMPS								
TYPE	HP	OUTLET INCH		DELIVERY (m3/h)				
				0	1	1,5	2	2,5
3 PK 15	0,8	1"	IIE	60	50	45	40	20
3 PK 20	1	1"		80	70	52	45	25